



Aluminium Light-Duty Control Enclosure CC-3000

Individual modular-design enclosures

Aluminium Light-Duty Control Enclosure CC-3000 – Individual modular-design enclosures

The BERNSTEIN CC-3000 light-duty control enclosure is particularly suitable for encapsulating operator control panels, IPCs and display components and, thanks to its modular concept, can be simply adapted to versions tailored to specific customer requirements. The aluminium sections can be simply cut to the required lengths and assembled with aluminium corner modules. Different depths of the enclosure are achieved by variably combining aluminium sections. In addition to various widths, heights and depths, we offer a wide variety of customer-specific solutions:

- Door hinge mounted on left or right
- Choice of colours
- Ready-to-use front panels according to customer specifications with screen print or engraving
- Front frame customisation
- System solutions including specific preparation and wiring

In most applications it is necessary to mount the enclosure on a machine or wall. The following BERNSTEIN suspension systems are ideally suited for this purpose:

- Light-duty suspension system Type CS-2000 SL
- Medium-duty suspension system Type CS-3000
- Heavy-duty suspension system Type CS-2000 System 80

Selection of the suitable system depends on the total weight of the enclosure. The enclosure sections are prepared (machined) corresponding to the specific suspension system. We would be pleased to assist you in selecting the right system for your application.

Product characteristics

- 5 possible enclosure designs (with or without integrated handles)
- Individual powder coating of the enclosure corners (standard: RAL 9006) and, on request, also of the sections (standard: naturally anodized)
- Single-walled sections provide outstanding heat dissipation (the air trapped in double-walled sections acts as thermal insulation, thus inhibiting heat dissipation)
- Rectangular front panels (this allows direct installation of commercially available controllers)
- Standard protection class IP 65 (max. widths and heights 600 x 600 mm)
- Extensive range of accessories
- Configuration corresponding to customer specifications (check list see 6, 7)
- Approbations: c UL us (Label on demand)



Single section configuration

	Front panel	Rear panel	Section depth	Installation depth
A	Internally mounted	Fixed or hinged	120	103
			200	183
B	Externally mounted	Fixed or hinged	120	111
			200	191



Aluminium section depth comparison:
200 mm (left) and 120 mm (right)

Configuration with combination of two sections (as door)

	Front panel	Rear panel	Section depth	Installation depth
C	Internally mounted	Internally mounted	120+55	149
			200+55	229
D	Externally mounted	Internally mounted	120+55	157
			200+55	237
E	Internally mounted	Externally mounted	120+55	157
			200+55	237
F	Externally mounted	Externally mounted	120+55	166
			200+55	246



120 mm section with additional
door extension (55 mm)

Enclosure dimensions

The height and width of the BERNSTEIN CC-3000 light-duty control enclosure can be varied up to a maximum recommended size of approx. 600 x 600 mm. Larger control enclosures are available on request.

BERNSTEIN offers two standard 120 mm and 200 mm wide sections for creating different enclosure depths. By combining with the 55 mm door extension for a total depth of 175 mm and 255 mm respectively.

The corresponding installation depths are listed above.

Individual modular-design enclosures – Discover the range



Application example with left-hand and right-hand handles



Internally mounted front panel



Fixed rear panel



Application example with handles all round



Externally mounted front panel



Hinged rear panel with lock

The BERNSTEIN CC-3000 light-duty control enclosure makes a total of 5 different enclosure designs possible by combining different sections. BERNSTEIN offers standard version sections and sections with handles:

- Without handles
- Handle only at bottom
- Handles on left and right
- Handles on left, right and bottom
- Handles all round

For the assembly of the internally-mounted front panel, a practical quick assembly system is used. No changes need to be made to the front panel. The retaining elements can be shifted to freely selectable and reversible positions within the sections in the enclosure.

Externally mounted front panels have threaded studs welded on the back allowing a screw connection of the front or rear panel. Even when the door extension is used, the rear panel can still be secured in the described manner.

The rear panel can be screwed down or configured as a door without restricting the installation space by using hinges or articulated hinges.



The extruded aluminium section features all-round grooves (see image), allowing components to be simply secured with spring nuts without the need for mechanical modification to the enclosure. Furthermore, a cable routing is simply possible within the area of suspension system attachment.

BERNSTEIN System Solutions

Expertise from under one roof

However, this is not all

- Suspension system components for mounting from above and below
- Different keyboard solutions
- Attachment elements for console versions
- Different interface solutions
- Internal, external fans or air conditioners
- Cable routing components





Checklist – Enclosure CC-3000

Customer	*Product group	*Code	*Article number
Address		Customer No.	
Telephone	Telefax	Industry	
Contact person		Department	
<input type="checkbox"/> Pricing enquiry			
		Target price	Quantity
<input type="checkbox"/> Enquiry			
		*Enquiry No.	Annual requirement
<input type="checkbox"/> Order			
Delivery date			

1 Enclosure

- ☐ Standard
☐ Console enclosure, upper section
☐ Console enclosure, lower section



Anticipated installation weight _____ kg

2 Dimensions (mm) (always referred to the standard section)

External enclosure dimensions


Width x height (W x H) _____ x _____

Front panel dimensions (e x f)

e x f = W - 40 x H - 40 _____ x _____

Rear panel dimensions W x H


Screw-fixed rear panel: W x H = W - 7 x H - 7 Hinged rear panel: W x H = W - 9 x H - 9

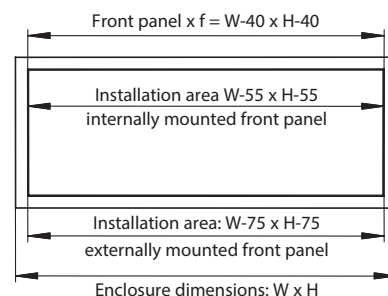

3 Front design (handle selection)




☐
None



☐
Bottom



☐
Left + right



☐
Left + right + bottom



☐
All-round

(Important! The external enclosure dimensions increase by 16.5 mm on the side where a handle strip is selected)

4 Enclosure without door section

Enclosure depth

External depth

☐ 120 mm

☐ 200 mm

Front panel position

Installation depth

Internal ☐ 103 mm

External ☐ 111 mm

Internal ☐ 183 mm

External ☐ 191 mm

Rear panel position

Screw-fixed or hinged

☐ Screw-fixed

☐ With standard hinge

☐ With screw-mounted rear panel hinge

5 Enclosure with door section 55 (FP = Front panel, RP = Rear panel)

Front door

or

Rear door

☐ 55 + 120

☐ 120 + 55

☐ FP and RP internal

☐ FP internal and RP external

☐ FP external and RP internal

☐ FP and RP external

☐ 55 + 200

☐ 200 + 55

☐ Installation depth 149 mm

☐ Installation depth 157 mm

☐ Installation depth 157 mm

☐ Installation depth 166 mm

☐ 55 + 200

☐ 200 + 55

☐ Installation depth 229 mm

☐ Installation depth 237 mm


☐ Installation depth 237 mm

☐ Installation depth 246 mm


External articulated hinges

* Completed by BERNSTEIN AG

6 Door mounting

☐ Left


or



or

☐ Right

7 Lock

Square (mm): ☐ 6

☐ 7

☐ 8 (Standard)

☐ T-handle without lock

Triangle (mm): ☐ 7

☐ 8

☐ 6,5 (CNOMO)

☐ T-handle with lock

Two-way bit (mm): ☐ 3

☐ 5

☐ E1 (without key)

Daimler Benz: ☐
☐ Special lock/customer specification

☐ T-handle E1 (without key)

8 Front panel

☐ None

☐ With

Keyboard drawer

from 175 mm depth

(2HE = 89 mm, 3HE = 134 mm)

☐ Without keyboard, 0°, without lock, 2HM

19" Installation kit _____ Qty.

☐ Without keyboard, 20°, without lock, 3HM

☐ Clamping element for Simatic

☐ With keyboard, 0°, without lock, German, PS2, 2HM

☐ With keyboard, 20°, without lock, German, PS2, 3HM

☐ To customer specification (description under Point 14)

9 Rear panel

☐ None

☐ With

10 Partition (partition height 13 mm)

☐ Vertical

_____ Qty.

☐ Not mounted (standard)

☐ Mounted on right

☐ Mounted on left

☐ Horizontal

_____ Qty.

☐ unmounted (standard)

☐ Bottom mounted

☐ Top mounted

11 Partial front panels

☐ none

1st operator panel: _____ Width x _____ Height

☐ Not mounted

☐ INTERNALLY mounted

☐ EXTERNALLY mounted _____ (Art. No. BP)

2nd operator panel: _____ Width x _____ Height

☐ Not mounted

☐ INTERNALLY mounted

☐ EXTERNALLY mounted _____ (Art. No. BP)

12 Preparation for suspension system ☐ None

☐ Standard preparation (flange SL/CS-3000)

☐ Turn/tilt coupling

☐ Tilt adapter (only section 200)

☐ Flange coupling 80 (only section 200)

☐ Console connector

☐ Automotive adapter

☐ WS coupling


☐ CS-3000/48

☐ Special preparation to

customer specification (see below)

☐ Top

Side

☐ Bottom

☐ SS cover, top ☐ SS cover, bottom

13 Surface finish

Basic sections:

Door sections:

Corner modules/end caps:

Partition:

Front panels:

Rear panels:

Standard

☐ Anodised, natural

☐ Anodised, natural

☐ RAL 9006, powder-coated

☐ Anodised, natural

☐ Anodised, natural

☐ Anodised, natural

Customer specification

☐ _____

☐ _____

☐ _____

☐ _____

Article number FP: _____

Article number RW: _____

14 Accessories, Remarks (included in delivery specification: key (except E1 lock) and earthing kit)

☐ KDL 16/4

☐ KDL 24/5

☐ Grommet 3-4 mm

☐ Grommet 6-7 mm

☐ Dummy grommet

Only with automotive adapter or without SS preparation (KDL = cable gland strip)

_____ Qty.

_____ Qty.

_____ Qty.

Additionally: _____

☐ Annexes

Slsmn. _____ TAV _____ TAV _____

☐ No Annexes



**Switch systems –
Economy meets safety**



**Sensor systems –
Compact intelligence**



**Enclosure systems –
Function and design**

www.bernstein.eu

Contact

International Headquarters BERNSTEIN AG

Hans-Bernstein-Str. 1
32457 Porta Westfalica
Fon +49 571 793-0
Fax +49 571 793-555
info@de.bernstein.eu
www.bernstein.eu

Denmark

BERNSTEIN A/S

Fon +45 7020 0522
Fax +45 7020 0177
info@dk.bernstein.eu

France

BERNSTEIN S.A.R.L.

Fon +33 1 64 66 32 50
Fax +33 1 64 66 10 02
info@fr.bernstein.eu

Italy

BERNSTEIN S.r.l.

Fon +39 035 4549037
Fax +39 035 4549647
info@it.bernstein.eu

United Kingdom

BERNSTEIN Ltd

Fon +44 1922 744999
Fax +44 1922 457555
info@uk.bernstein.eu

Austria

BERNSTEIN GmbH

Fon +43 2256 62070-0
Fax +43 2256 62618
info@at.bernstein.eu

Switzerland

BERNSTEIN (Schweiz) AG

Fon +41 44 775 71-71
Fax +41 44 775 71-72
info@ch.bernstein.eu

Hungary

BERNSTEIN Kft.

Fon +36 1 4342295
Fax +36 1 4342299
info@hu.bernstein.eu

China

BERNSTEIN Safe Solutions (Taicang) Co., Ltd.

Fon +86 512 81608180
Fax +86 512 81608181
info@bernstein-safesolutions.cn