


Safety switch Series SLC

Description **SLC-F-024-11/11-R6**

Article number **6018200013**

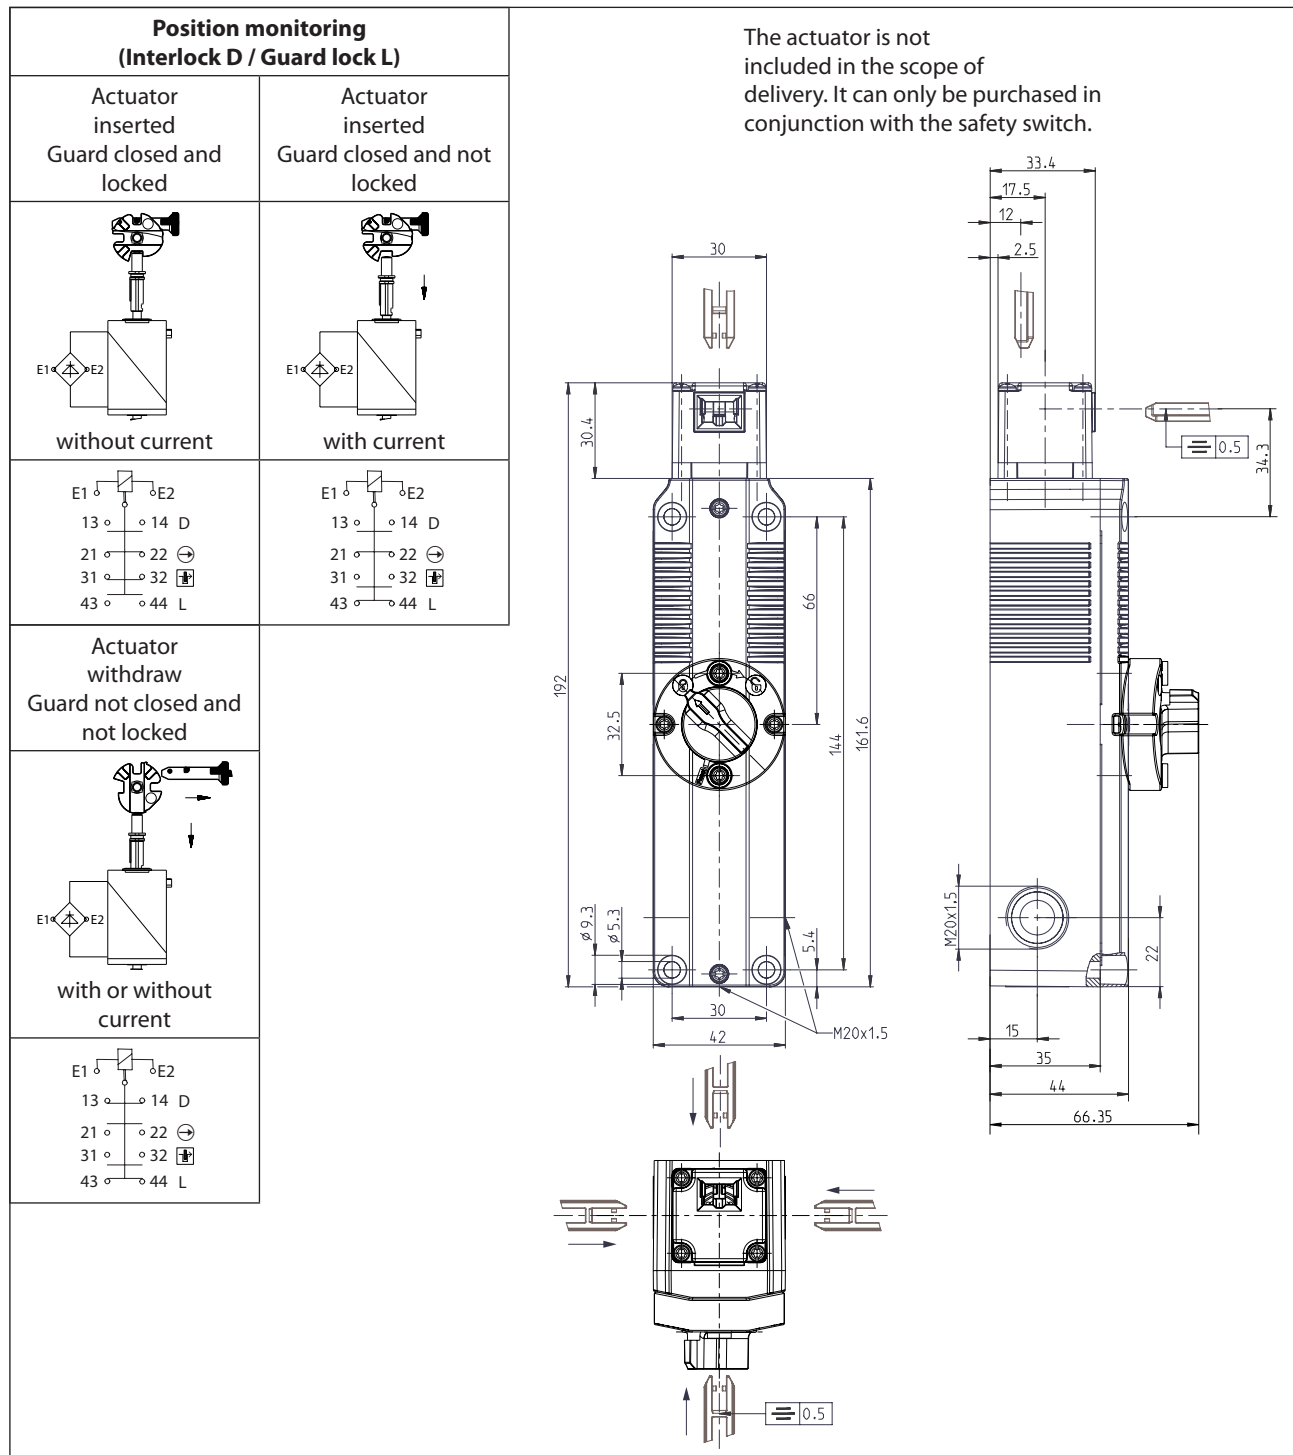

Electrical data		
Protection class		II, totally insulated
Contact elements		
Rated insulation voltage	U _i	250 V
Rated impulse withstand voltage	U _{imp}	2,5 kV
Rated operational voltage	U _e	240 V AC / 24 V AC/DC
Conv. thermal current	I _{the}	5 A
Utilization category acc. to IEC		AC-15, U _e / I _e 240 V / 1,5 A DC-13, U _e / I _e 24 V / 1,5 A; 250 V / 0,11 A
Utilization category acc. to UL / CSA		B300 R300 (same polarity)
Direct opening action	⊕	according to IEC/EN 60947-5-1, Annex K
Short-circuit protective device		4 A gG
Rated conditional short-circuit current		400 A
Electro magnet		
Duty cycle		100 % ED (at E1; E2)
Temperature class		F (155 °C)
Permanent power consumption		6,7 VA (W)
Switch operations permanent		10 / min
Operating voltage		24 V AC / DC (+10 % / -15 %)

Mechanical data		
Enclosure	Thermoplastic, glass fibre reinforced (UL 94-V0)	
Cover	Thermoplastic, glass fibre reinforced (UL 94-V0)	
Actuating head	Thermoplastic, glass fibre reinforced / Zn-GD	
Actuator	Separate actuator	
Minimum actuating radius	R_{min}	see separate actuators data sheet
Velocity for actuating	V_{max}	0,5 m/s
Extraction force	≤ 10 N	
Interlocking principle	Spring force	
Unlocking	a) magnetic force b) emergency unlocking of the front side and auxiliary unlocking of the rear side	
Holding force	F_{Zh}	1500 N (EN ISO 14119)
Ambient air temperature	-25 °C to +55 °C	
Contact type	Interlock (D): 1 NC, 1 NO Guard lock (L): 1 NC, 1 NO	
Switching principle	4 slow make and break contact elements	
Mechanical life	1 x 10 ⁶ switching cycles	
Assembly	4 x M5	
Connection	Screw connection	
Conductor cross-sections	0,34 ... 1,5 mm ² flexible	
Cable entrance	3 x M20x1,5	
Weight	≈ 0,484 kg	
Installation position	operator definable	
Protection type	IP67 acc. to IEC/EN 60529 ; (UL 50 E / CSA C22.2) Type 6 indoor use only	

ID for safety engineering	
B10d	2 x 10 ⁶ Cycles (at DC-13; 24 V; 0,1 A)

Standards	
	DIN EN 60947-5-1
	UL 508 18th Edition, CSA-C22.2 No.14-18
	GS-ET-19 (DGVV)
	DIN EN ISO 14119
	DIN EN ISO 13849-1

EU Conformity	
	acc. to directive 2006/42/EC (Safety-of-Machinery-Directive)

Approvals		
	DGVV	(in preparation)
	cCSA _{US}	
	CCC	

Notes
<p>The degree of protection (IP code) specified applies solely to a property closed cover and the use of an equivalent cable gland with adequate cable.</p> <p>The switch may not be used as a mechanical stop.</p> <p>In the event of a power failure, the guard remains locked.</p>